

The background of the cover is an abstract composition of light trails. A bright, jagged yellow lightning bolt streaks across the top half of the image. Below it, a dense, chaotic pattern of white and yellow light trails forms a horizontal band. The bottom half of the image is a solid, warm golden-brown color.

CATALOG 2018
LED LAMP

Marelli
lighting

Why LED ?

LED Basics and Background

A light-emitting diode (LED) is a semiconductor chip that emits light when conducting current. LED's are very versatile due to their ability to emit nearly all spectrums of light. This has led to their nearly universal adoption as a light source for a wide range of applications from: status indicator lights, to traffic signals, to today's advanced direct replacement LED light sources.

Although, LED's that produce a practical spectrum of visible light have been under constant development since the 1960's, only recently have LED's produced acceptable levels of illumination. The pace of innovation in the field of LED is currently progressing at an amazing pace. The latest xLEDs produced for ERCOLE MARELLI POWER are a breakthrough in technology!

Benefits of LEDs

Long Life

LEDs are rated to have a 50,000+ hour lifespan: in this same amount of time you will buy over 50 regular incandescent bulbs or 5 compact florescent bulbs!

Efficiency

Traditional incandescent bulbs waste 98% of their energy producing wasted heat. xLEDs on the other hand produce very little heat in order to maintain brilliant light, saving and even assist in cooling costs.

Cost Savings

Cost savings by replacing traditional bulbs or even fluo bulbs by xLEDs are huge, and account significantly decreasing the cost of energy, bulb replacements, maintenance, fixtures, transportation, security...

Save the Planet

xLEDs are the most environmentally friendly light source other than pure sunlight. First, there are no hazardous substances used inside xLEDs. All of our products are RoHS compliant (a strict new standard reducing hazardous substances), contrary to Compact Florescent Bulbs (CFL), all made with mercury or other non-recyclable materials.

xLEDs are part of the solution to the energy crisis we are all facing. xLEDs use less power up front and generate less heat when used. Replacing all lighting with

xLEDs will suddenly make your building an environmentally friendly structure.

With the long life you will achieve from your xLED, you will save on the disposal of approximately 50 incandescent bulbs and 5 mercury tainted, compact fluorescent bulbs thus cleaning up our landfills and ultimately saving our environment from waste.

Pure Light

xLEDs are available in white and warm light color temperatures for the utmost in flexibility. No matter which temperature you choose, you will always get pure, clear light that makes reading or viewing objects easier on the eyes. No more annoying flickering and headaches caused by compact fluorescent bulbs.

CONTENTS

LED COB SPOTLIGHT SERIES	1
LED FIN-TYPE SPOTLIGHT SERIES	6
RGB LED SPOTLIGHT SERIES	8
LED HIGH POWER SPOTLIGHT SERIES	9
LED SMD SPOTLIGHT SERIES	13
G4 + G9 LIGHT SERIES	26
LED BULB LIGHT SERIES	27
LED CANDLE LIGHT SERIES	31
R TYPE BULB LIGHT SERIES	33
EMERGENCY LED TUBE LIGHT SERIES	35
VARIABLE COLOR TEMPERATURE TUBE LIGHT SERIES	36
INFRARED SENSOR LED TUBE LIGHT SERIES	37
SWITCH DIMMABLE LED TUBE LIGHT SERIES	38
LED TUBE LIGHT SERIES	39
LED ROTATABLE G24 PL SERIES	40
LED SMD PANEL LIGHT SERIES	41
LED RIGID STRIP LIGHT AND ACCESSORIES	43

LED COB SPOTLIGHT SERIES

Marelli
lighting



GU10R-COB4W



GU10AL-COB4W



MR16AL-COB5W



GU10AL-COB5W





Item:MR16N-COB7W
Housing Material: Plastic body + Acrylic cover
Glass cover color: Transparent
LED:COB7W CRI:70-85
Color: Warm white, Cool white Beam Angle:30°
Brightness: Warm white 430LM Cool white 480LM
Wattage:7W Lamp Base:MR16
Input Voltage: AC/DC12V
Product Size: Dø82mmXH50mm



| MR16N-COB7W



Item:GU10N-COB7W
Housing Material: Plastic body+ Acrylic cover
Glass cover color: Transparent
LED:COB7W CRI:70-85
Color: Warm white, Cool white Beam Angle:30°
Brightness: Warm white 430LM Cool white 480LM
Wattage:7W Lamp Base:GU10
Input Voltage:AC100-240V 50-60Hz
Product Size: Dø64mmXH58mm



| GU10N-COB7W



Item:AR70-2X5W
Housing Material: Aluminum Body (super cooling housing)
LED: COB 2*5W
Beam angle:24°
Color: Warm white 2700-3200K, Cool white 6000-6500K
CRI:70-85
Brightness: Warm white710LM,Cool white 800LM
Wattage:10W
Input Voltage:AC100-240V 50-60Hz
Lamp base: G53
Size: Dø69.5mm x H67mm



| AR70-2X5W



Item:AR111C-2X6W
Housing Material: Aluminum material
Beam Angle:30° CRI:70-85
LED: COB 2X6W Base:G53/GU10/E27
Brightness: Warm white 840LM Cool white 860LM
Color: WW:2700-2900K CW: 6000-6500K
Wattage:13W
Input Voltage:AC100-240V 50-60Hz
Product Size: Dø111mmXH83mm (G53 Base)



GU10 Base



E27 Base



G53 Base



| AR111C-2X6W

LED COB SPOTLIGHT SERIES

Marelli
lighting



PAR30D-COB10W



Item: PAR30D-COB10W
Housing Material: Aluminum Body+ Reflector cup
Beam angle: 30°
LED: COB 10W
Color: Warm white 2700-3200K, Cool white 6000-6500K
CRI: 70-85
Brightness: Warm white 800LM, Cool White 830LM
Wattage: 10W
Input Voltage: AC100-240V 50-60Hz
Lamp base: E27



PAR38D-COB15W



Item: PAR38D-COB15W
Housing Material: Aluminum Body+ reflector cup
Beam angle: 30°
LED: COB 15W
Color: Warm white 2700-3200K, Cool white 6000-6500K
CRI: 70-85
Brightness: Warm white 1550LM, Cool white 1600LM
Wattage: 17W
Input Voltage: AC100-240V 50-60Hz
Lamp base: E27



PAR30C-COB10W



Item: PAR30C-COB10W
Housing Material: aluminum body
Beam angle: 30°
LED: COB 10W
Color: Warm white 2700-3200K, Cool white 6000-6500K
CRI: 70-85
Brightness: Warm white 650 LM, White 680LM
Wattage: 10.5W
Input Voltage: AC100-240V 50-60Hz
Lamp base: E27



PAR38C-COB15W



Item: PAR38C-COB15W
Housing Material: Aluminum Body + Lens
Beam angle: 30°
LED: COB 15W
Color: Warm white 2700-3200K, Cool white 6000-6500K
CRI: 70-85
Brightness: Warm white 1200 LM, Cool white 1250LM
Wattage: 17W
Input Voltage: AC100-240V 50-60Hz
Lamp base: E27



Item: PAR20A-COB6W
Housing Material: Aluminum body
Beam angle: 30°
LED: COB 6W CRI: 70-85
Color: Warm white 2700-3200K, Cool white 6000-6500K
Brightness: Warm white 500LM, Cool white 540LM
Wattage: 7.5W Lamp base: E27
Input Voltage: AC100-240V 50-60Hz



PAR20A-COB6W



Item: PAR20A-COB9W
Housing Material: Aluminum body
Beam angle: 30°
LED: COB 9W CRI: 70-85
Color: Warm white 2700-3200K, Cool white 6000-6500K
Brightness: Warm white 700LM, Cool white 750LM
Wattage: 9W Lamp base: E27
Input Voltage: AC100-240V 50-60Hz



PAR20A-COB9W



Item: PAR30A-COB12W
Housing Material: aluminum body
Beam angle: 30°
LED: COB 12W CRI: 70-85
Color: Warm white 2700-3200K, Natural white 4000-4500K, Cool white 6000-6500K
Brightness: Warm white 700LM, Natural white 1000LM, Cool white 750LM
Wattage: 12W Lamp base: E27
Input Voltage: AC100-240V 50-60Hz



PAR30A-COB12W



Item: PAR38A-COB15W
Housing Material: aluminum body
Beam angle: 30°
LED: COB 15W CRI: 70-85
Color: Warm white 2700-3200K, Natural white 4000-4500K, Cool white 6000-6500K
Brightness: Warm white 1150LM, Natural white 1180LM, Cool white 1200LM
Wattage: 15W Lamp base: E27
Input Voltage: AC100-240V 50-60Hz



PAR38A-COB15W

LED SMD PAR SPOTLIGHT SERIES

Marelli
lighting



PAR20AL-SMD70C



Item: PAR20AL-SMD70C
Housing Material: Aluminum body+ Glass cover
Glass cover color: Transparent
LED: SMD3014 70LEDS
CRI: 70-85
Color: Warm white, Cool white
Lamp Base: E27
Brightness: Warm white 600lm Cool white 620lm
Wattage: 6W
Input Voltage: AC200-240V 50-60Hz
Product Size: D 63mm x H 90mm



PAR30E27AL-SMD80C



Item: PAR30E27AL-SMD80C
Housing Material: Aluminum body + Glass cover
Glass cover color: Bead Glass
LED: SMD3014 80leds CRI: 70-85
Color: Warm white, Cool white
Lamp Base: E27
Brightness: white 830LM Warm white 800LM
Wattage: 8W
Input Voltage: AC220-240V 50-60Hz
Product Size: D 97mm x H 95mm



PAR38E27AL-SMD120C



Item: PAR38E27AL-SMD120C
Housing Material: Aluminum body + Glass cover
Glass cover color: Bead Glass
LED: SMD3014 120leds
CRI: 70-85
Color: Warm white, Cool white
Lamp Base: E27
Brightness: white 1100LM Warm white 1000LM
Wattage: 10W
Input Voltage: AC200-240V 50-60Hz
Product Size: D 125mm x H 128mm





Item: PAR20A-5X1W
Housing Material: Aluminum material
Beam Angle: 60°
LED: High Power LED 1W CRI: 70-85
Brightness: White 400LM Warm white 350LM
Color: White, Warm white
Wattage: 6.5W Lamp Base: E27
Input Voltage: AC100-240V 50-60Hz



I PAR20A-5x1W



Item: PAR20A-3x2W
Housing Material: Aluminium material
Beam Angle: 30° CRI: 70-85
Brightness: White 340LM Warmwhite 340LM
LED: High Power LED 3W
Color: White, Warmwhite
Wattage: 5.5W Lamp Base: E27
Input Voltage: AC100-240V 50-60Hz



I PAR20A-3x2W



Item: PAR30A-9x1W
Housing Material: Aluminium material
Beam Angle: 30° CRI: 70-85
Brightness: White 670LM Warmwhite 700LM
LED: High Power LED 1W
Color: White, Warmwhite
Wattage: 10W Lamp Base: E27
Input Voltage: AC100-240V 50-60Hz



I PAR30A-9x1W



Item: PAR38A-12x1W
Housing Material: Aluminium material
Beam Angle: 30° CRI: 70-85
Brightness: White 920LM Warmwhite 1000LM
LED: High Power LED 1W
Color: White, Warmwhite
Wattage: 13W Lamp Base: E27
Input Voltage: AC100-240V 50-60Hz



I PAR38A-12x1W

LED AR111 SPOTLIGHT SERIES

Marelli
lighting



AR111B-9x1W



Item: AR111B-9X1W
Housing: Aluminum Lens: 30°
LED: 9X1W CRI: 70-85
Color: White, Warm white
Wattage: 10W Volt: AC100-240v 50-60Hz
Brightness: White 600lm Warm white 550lm
Product Size: GU10 D111XH74mm
E27 D111XH81mm
G53 D111mmXH67mm



GU10 Base



E27 Base



G53 Base



AR80A-5x1W



Item: AR80A-5x1W
Housing Material: Aluminium material
Beam Angle: 30° CRI: 70-85
Brightness: White 440LM Warmwhite 460LM
LED: High Power LED 1W
Color: White, Warm white
Wattage: 5.5W Lamp Base: G53
Input Voltage: AC100-240V 50-60Hz





Item: DMX-RGB50D-5W
Housing Material: Ceramics body & Transparent PC cover
Glass Cover color: Transparent
LED: High Power RGB 3 in 1 1pc
Color: RGB
Wattage: 3W Lamp Base: 5 Pin Connector
Input Voltage: DC12V
Product Size: D ϕ 50mmxH50mm



Item: MR16D-RGB-5W (With Remote Function)
Housing Material: Ceramics body & Transparent PC cover
Glass Cover color: Transparent
LED: High Power RGB 3 in 1 1pc
Color: RGB
Wattage: 3.5W Lamp Base: GU5.3
Input Voltage: AC/DC12V
Product Size: D ϕ 50mmxH54mm



MR16D-RGB-5W



Item: GU10D-RGB-5W (With Remote Function)
Housing Material: Ceramics body & Transparent PC cover
Glass Cover color: Transparent
LED: High Power RGB 3 in 1 1pc
Color: RGB
Wattage: 4.5W Lamp Base: GU10
Input Voltage: AC100~240V 50~60Hz
Product Size: D ϕ 50mmxH68mm




GU10D-RGB-5W



Item: E27D-RGB-5W (With Remote Function)
Housing Material: Ceramics body & Transparent PC cover
Glass Cover color: Transparent
LED: High Power RGB 3 in 1 1pc
Color: RGB
Wattage: 4.5W Lamp Base: E27
Input Voltage: AC100~240V 50~60Hz
Product Size: D ϕ 50mmxH82mm



E27D-RGB-5W

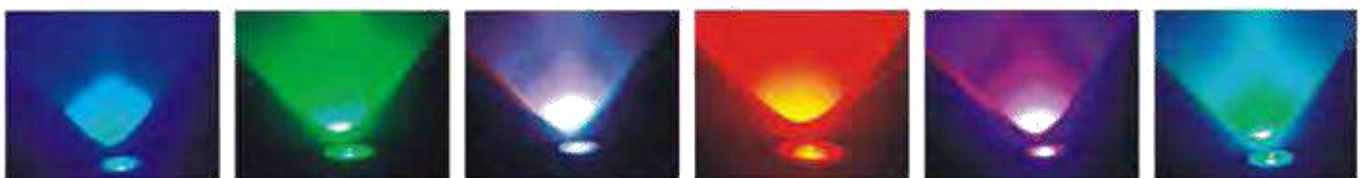



MR16CR-4x1W



Item: MR16CR-4x1W
Housing Material: Ceramics body
Beam Angle: 30° CRI: 70-85
Brightness: White 340 LM Warm white 290 LM
LED: High power LED 1W
Color: White, Warmwhite
Wattage: 5W Lamp Base: GU5.3
Input Voltage: AC/DC12V



GU10CR-4x1W



Item: GU10CR-4x1W
Housing Material: Ceramics body
Beam Angle: 30° CRI: 70-85
Brightness: White 340 LM Warmwhite 290 LM
LED: High power LED 1W
Color: White, Warmwhite
Wattage: 5W Lamp Base: GU10
Input Voltage: AC100-240V 50-60Hz



E27CR-4x1W



Item: E27CR-4x1W
Housing Material: Ceramics body
Beam Angle: 30° CRI: 70-85
Brightness: White 340 LM Warmwhite 290 LM
LED: High power LED 1W
Color: White, Warmwhite
Wattage: 5W Lamp Base: E27
Input Voltage: AC100-240V 50-60Hz



Item: MR16L-4X1W
Housing Material: Aluminum body
Lens: 45°
LED: High Power led 4X1W CRI: 60-80
Color: Warm white Cool white
Brightness: Warm white 300lm, Cool white 340lm Lamp Base: GU5.3
Wattage: 4W Input Voltage: AC/DC 12V
Product Size: D ϕ 50mmXH53mm



MR16L-4X1W



Item: GU10L-4X1W
Housing Material: Aluminum body
Lens: 45°
LED: High Power led 4X1W CRI: 60-80
Color: Warm white, Cool white Lamp Base: GU10
Brightness: Warm white 300lm Cool white 340lm
Wattage: 4W Input Voltage: AC 100-240V 50-60Hz
Product Size: D ϕ 50mmXH62mm



GU10L-4X1W



Item: JDRE14L-4X1W
Housing Material: Aluminum body
Lens: 45°
LED: High Power led 4X1W CRI: 60-80
Color: Warm white, Cool white Lamp Base: E14
Brightness: Warm white 300lm Cool white 340lm
Wattage: 4W Input Voltage: AC 100-240V 50-60Hz
Product Size: D ϕ 50mmXH75mm



JDRE14L-4x1W



Item: JDRE27L-4X1W
Housing Material: Aluminum body
Lens: 45°
LED: High Power led 4X1W CRI: 60-80
Color: Warm white, Cool white Lamp Base: E27
Brightness: Warm white 300lm Cool white 340lm
Wattage: 4W
Input Voltage: AC 100-240V 50-60Hz



JDRE27L-4x1W



MR16E-1X3W



MR16E-3X1W



Item: MR16E-1X3W
MR16E-3X1W
Housing Material: Aluminium body
Lens: 30° or 60° CRI: 60-80
LED: 1X3W or 3X1W
Color: Warmwhite, Coolwhite
Wattage: 3W Lamp Base: GU5.3
Input Voltage: AC/DC12V
Product Size: MR16E-1X3W D $\varnothing$ 50mmxH55mm
MR16E-3X1W D $\varnothing$ 50mmxH49mm



GU10E-1X3W



GU10E-3X1W



Item: GU10E-1X3W
GU10E-3X1W
Housing Material: Aluminium body
Lens: 30° or 60° CRI: 60-80
LED: 1X3W or 3X1W
Color: Warmwhite, Coolwhite
Wattage: 3W Lamp Base: GU10
Input Voltage: AC85V-260V 50Hz/60Hz
Product Size: GU10E-1X3W D $\varnothing$ 50mmxH66mm
GU10E-3X1W D $\varnothing$ 50mmxH60mm



JDRE27E-1X3W



JDRE27E-3X1W



Item: JDRE27E-1X3W
JDRE27E-3X1W
Housing Material: Aluminium body
Lens: 30° or 60° CRI: 60-80
LED: 1X3W or 3X1W
Color: Warmwhite, Coolwhite
Wattage: 3W Lamp Base: JDRE27
Input Voltage: AC85V-260V 50Hz/60Hz
Product Size: JDRE27E-1X3W D $\varnothing$ 50mmxH81mm
JDRE27E-3X1W D $\varnothing$ 50mmxH75mm



JDRE14E-1X3W



JDRE14E-3X1W



Item: JDRE14E-1X3W
JDRE14E-3X1W
Housing Material: Aluminium body
Lens: 30° or 60° CRI: 60-80
LED: 1X3W or 3X1W
Color: Warmwhite, Coolwhite
Wattage: 3W Lamp Base: JDRE14
Input Voltage: AC85V-260V 50Hz/60Hz
Product Size: JDRE14E-1X3W D $\varnothing$ 50mmxH81mm
JDRE14E-3X1W D $\varnothing$ 50mmxH75mm





MR16P-SMD9D



Item:MR16P-SMD9D
 Housing material: Thermal Plastic+Optical Lens cover
 LED: SMD 2835
 Color: Warm white, White
 Brightness: Warm white 180lm, White 180lm
 Wattage:2W
 Beam Angle: 60°
 Lamp Base:MR16
 Voltage: AC/DC 12V
 size: D Φ 50mm * H48mm



GU10P-SMD9D



Item:GU10N-SMD9D
 Housing material: Thermal Plastic+Optical Lens cover
 LED: SMD 2835
 Color: Warm white, White
 Brightness: Warm white 180lm, White 180lm
 Wattage:2W
 Beam Angle: 60°
 Lamp Base:GU10
 Voltage: AC220-240V 50-60Hz
 Size: D Φ 50mm * H58mm



MR16Q-SMD9D



Item:MR16-SMD9D
 Housing material: Thermal Plastic+Optical Lens cover
 LED: SMD 2835
 Color: Warm white, White
 Brightness: Warm white 180lm, White 180lm
 Wattage:2W
 Beam Angle: 24°
 Lamp Base:MR16
 Voltage: AC220-240V 50-60Hz
 Size: D Φ 50mm * H52.5mm



GU10Q-SMD9D



Item:GU10N-SMD9D
 Housing material: Thermal Plastic+Optical Lens cover
 LED: SMD 2835
 Color: Warm white, White
 Brightness: Warm white 180lm, White 180lm
 Wattage:2W
 Beam Angle: 24°
 Lamp Base:GU10
 Voltage: AC220-240V 50-60Hz
 Size: D Φ 50mm * H62.5mm



Item: HRE27CR-SMD24D
Housing material: Aluminum Body+Glass Milky cover
LED: SMD 2835
Beam Angle: 120°
Color: Warm white, White
Brightness: Warm white 400lm, White 400lm
Wattage: 4W
Lamp Base: E27
Voltage: AC220-240V 50-60Hz



| HRE27CR-SMD24D



Item: GU10CR-SMD24D
Housing material: Aluminum Body+Glass Milky cover
LED: SMD 2835
Beam Angle: 120°
Color: Warm white, White
Brightness: Warm white 400lm, White 400lm
Wattage: 4W
Lamp Base: GU10
Voltage: AC220-240V 50-60Hz



| GU10CR-SMD24D



Item: GU10A-SMD18D
Housing material: Glass Body+Glass Transparent cover
LED: SMD 2835
Color: Warm white, Natural white, Cool white
CRI: 70-85
Brightness: Warm white 310lm, Natural white 330lm, Cool white 350lm
Wattage: 3W
Lamp Base: GU10
Voltage: AC220-240V 50-60Hz
Size: D ϕ 50xH58mm



Item: JDRE27A-SMD18D
Housing material: Glass Body+Glass Transparent cover
LED: SMD 2835
Color: Warm white, Natural white, Cool white
CRI: 70-85
Brightness: Warm white 310lm, Natural white 330lm, Cool white 350lm
Wattage: 3W
Lamp Base: E27
Voltage: AC220-240V 50-60Hz
Size: D ϕ 50xH73mm



Item: JDRE14A-SMD18D
Housing material: Glass Body+Glass Transparent cover
LED: SMD 2835
Color: Warm white, Natural white, Cool white
CRI: 70-85
Brightness: Warm white 310lm, Natural white 330lm, Cool white 350lm
Wattage: 3W
Lamp Base: E14
Voltage: AC220-240V 50-60Hz
Size: D ϕ 50xH73mm



Item: MR16A-SMD36C
Housing Material: Glass body + Glass cover
Beam Angle: 120°
LED: SMD3014 36LEDS
Brightness: Warm white 290LM Cool white 330LM
Wattage: 3W CRI: 70-85
Input Voltage: AC/DC 12V



| MR16A-SMD36C



Item: GU10A-SMD36C
Housing Material: Glass body + Glass cover
Beam Angle: 120°
LED: SMD3014 36LEDS
Brightness: Warm white 290LM Cool white 330LM
Wattage: 3W CRI: 70-85
Input Voltage: AC220-240V 50-60Hz



| GU10A-SMD36C



Item: JDRE27A-SMD36C
Housing Material: Glass body + Glass cover
Beam Angle: 120°
LED: SMD3014 36LEDS
Brightness: Warm white 290LM Cool white 330LM
Wattage: 3W CRI: 70-85
Input Voltage: AC220-240V 50-60Hz



| JDRE27A-SMD36C



Item: JDRE14A-SMD36C
Housing Material: Glass body + Glass cover
Beam Angle: 120°
LED: SMD3014 36LEDS
Brightness: Warm white 290LM Cool white 330LM
Wattage: 3W CRI: 70-85
Input Voltage: AC220-240V 50-60Hz



| JDRE14A-SMD36C



I MR16A-SMD30C



Item: MR16A-SMD30C
 Housing Material: Glass body+Glass cover
 Beam Angle: 120°
 LED: SMD3014 30LEDs
 Brightness: Warm white 280LM Cool white 300LM
 Wattage: 3W CRI: 70-85
 Input Voltage: MR16 AC/DC 12V



I GU10A-SMD30C



Item: GU10A-SMD30C
 Housing Material: Glass body+Glass cover
 Beam Angle: 120°
 LED: SMD3014 30LEDs
 Brightness: Warm white 280LM Cool white 300LM
 Wattage: 3W CRI: 70-85
 Input Voltage: AC220-240V 50-60Hz



I JDRE14A-SMD30C



Item: JDRE14A-SMD30C
 Housing Material: Glass body+Glass cover
 Beam Angle: 120°
 LED: SMD3014 30LEDs
 Brightness: Warm white 280LM Cool white 300LM
 Wattage: 3W CRI: 70-85
 Input Voltage: AC220-240V 50-60Hz



I JDRE27A-SMD30C



Item: JDRE27A-SMD30C
 Housing Material: Glass body+Glass cover
 Beam Angle: 120°
 LED: SMD3014 30LEDs
 Brightness: Warm white 280LM Cool white 300LM
 Wattage: 3W CRI: 70-85
 Input Voltage: AC220-240V 50-60Hz



Item: GU20A-SMD50C
Housing Material: Glass body + Glass cover
Glass cover: Transparent
LED: SMD3014 50leds CRI: 70-85
Color: Warm white, Cool white Lamp Base: GU20
Brightness: Warm white 530LM Cool white 560LM
Wattage: 5W
Input Voltage: AC220-240V 50-60Hz
Product Size: D63mmXH65mm



GU20A-SMD50C



Item: JDR20E27A-SMD50C
Housing Material: Glass body + Glass cover
Glass cover: Transparent
LED: SMD3014 50LEDs CRI: 70-85
Color: Warm white, Cool white Lamp Base: E27
Brightness: Warm white 530lm Cool white 560
Wattage: 5W
Input Voltage: AC220-240V 50Hz
Product Size: D63mmXH84mm



JDR20E27A-SMD50C




MR16A-SMD48S


Item:MR16-SMD48S
 Housing Material: Glass Body & Glass cover
 Glass cover color: Transparent
 LED:SMD3528 CRI:70-85
 Color: Warm white, Cool white Lamp Base:GU10
 Wattage:3W Brightness:180LM
 Input Voltage:AC100-240V 50-60Hz
 Product Size: D ϕ 50mmXH58mm


GU10A-SMD48S


Item:GU10A-SMD48S
 Housing Material: Glass body & Glass cover
 Glass cover color: Transparent
 LED:SMD3528 CRI:70-85
 Color: Warm white, Cool white Lamp Base:GU10
 Wattage:3W Brightness:180LM
 Input Voltage:AC100-240V 50-60Hz
 Product Size: D ϕ 50mmXH58mm


JDRE14A-SMD48S


Item:JDRE14A-SMD48S
 Housing Material: Glass body & Glass cover
 Glass cover color: Transparent
 LED:SMD3528 CRI:70-85
 Color: Warm white, Cool white Lamp Base:JDRE14
 Wattage:3W Brightness:180LM
 Input Voltage:AC100-240V 50-60Hz
 Product Size: D ϕ 50mmXH75mm


JDRE27A-SMD48S


Item:JDRE27A-SMD48S
 Housing Material: Glass body + Glass cover
 Glass cover color: Transparent
 LED:SMD3528 CRI:70-85
 Color: Warm white, Cool white Lamp Base:JDRE27
 Wattage:3W Brightness:180LM
 Input Voltage:AC100-240V 50-60Hz
 Product Size: D ϕ 50mmXH77mm



Item: GU10AL-SMD24D
Housing material: Aluminum Body+Glass Transparent cover
LED: SMD 2835
Color: Warm white, Natural white, Cool white
CRI: 70-85
Brightness: Warm white 410lm, Natural white 430lm, White 450lm
Wattage: 4W
Lamp Base: GU10
Voltage: AC220-240V 50-60Hz
Size: D ϕ 50xH59mm



Item: JDRE27AL-SMD24D
Housing material: Aluminum Body+Glass Transparent cover
LED: SMD 2835
Color: Warm white, Natural white, Cool white
CRI: 70-85
Brightness: Warm white 410lm, Natural white 430lm, White 450lm
Wattage: 4W
Lamp Base: E27
Voltage: AC220-240V 50-60Hz
Size: D ϕ 50xH77mm



Item: JDRE14AL-SMD24D
Housing material: Aluminum Body+Glass Transparent cover
LED: SMD 2835
Color: Warm white, Natural white, Cool white
CRI: 70-85
Brightness: Warm white 410lm, Natural white 430lm, White 450lm
Wattage: 4W
Lamp Base: E14
Voltage: AC220-240V 50-60Hz
Size: D ϕ 50xH79mm




I GU10AL-SMD42C


Item: GU10AL-SMD42C
 Housing Material: Aluminum Body & Glass cover
 Glass cover color: Transparent
 LED: SMD3014 42LEDs CRI: 70-85
 Color: Warm white, Cool white Lamp Base: GU10
 Brightness: Warm white 400lm Cool white 430lm
 Wattage: 4W
 Input Voltage: AC220-240V 50-60Hz
 Product Size: D ϕ 50mmXH59mm


I JDRE27AL-SMD42C


Item: JDRE27AL-SMD42C
 Housing Material: Aluminum body & Glass cover
 Glass cover color: Transparent
 LED: SMD3014 42LEDs CRI: 70-85
 Color: Warm white, Cool white Lamp Base: E27
 Brightness: Warm white 400lm Cool white 430lm
 Wattage: 4W
 Input Voltage: AC220-240V 50-60Hz


I JDRE14AL-SMD42C


Item: JDRE14AL-SMD42C
 Housing Material: Aluminum body & Glass cover
 Glass cover color: Transparent
 LED: SMD3014 42LEDs CRI: 70-85
 Color: Warm white, Cool white
 Lamp Base: E14
 Brightness: Warm white 400lm Cool white 430lm
 Wattage: 4W
 Input Voltage: AC220-240V 50-60Hz



Item: GU20AL-SMD70C
Housing Material: Aluminum body + Glass cover
Glass cover color: Bead Glass
LED: SMD3014 70LEDS CRI: 70-85
Color: Warm white, Cool white
Brightness: Warm white 600lm
Cool white 620lm
Wattage: 6W Lamp Base: GU10
Input Voltage: AC220-240V 50-60Hz



GU20AL-SMD70C



产品型号: JDRE27AL-SMD70C
主要材质: 铝灯体+玻璃盖
玻璃罩颜色: 全珠面
光源: SMD3014 70LEDS
颜色: 暖白, 冷白
亮度: 暖白 600lm 冷白 630lm
显色指数: 70-85
功率: 6W 底座: E27
电压: AC220-240V 50-60Hz

Item: JDRE27AL-SMD70C
Housing Material: Aluminum body + Glass cover
Glass cover color: Bead Glass
LED: SMD3014 70LEDS CRI: 70-85
Color: Warm white, Cool white
Brightness: Warm white 600lm Cool white 620lm
Wattage: 6W Lamp Base: E27
Input Voltage: AC220-240V 50-60Hz



JDR20E27AL-SMD70C


MR16AL-SMD48S


Item: MR16AL-SMD48S
 Housing Material: Aluminum body+Glass cover
 Beam Angle: 120°
 LED: SMD3528 48LEDS
 Brightness: Warm white 180LM
 Cool white 180LM
 Wattage: 3.5W CRI: 70-85
 Input Voltage: AC/DC 12V


GU10AL-SMD48S


Item: GU10AL-SMD48S
 Housing Material: Aluminum body+Glass cover
 Beam Angle: 120°
 LED: SMD3528 48LEDS
 Brightness: Warm white 180LM
 Cool white 180LM
 Wattage: 3.5W CRI: 70-85
 Input Voltage: AC100-240V 50-60Hz


JDRE27AL-SMD60S


Item: JDRE27AL-SMD48S
 Housing Material: Aluminum body+Glass cover
 Beam Angle: 120°
 LED: SMD3528 48LEDS
 Brightness: Warm white 180LM
 Cool white 180LM
 Wattage: 3.5W CRI: 70-85
 Input Voltage: AC100-240V 50-60Hz


JDRE14AL-SMD60S


Item: JDRE14AL-SMD48S
 Housing Material: Aluminum body+Glass cover
 Beam Angle: 120°
 LED: SMD3528 48LEDS
 Brightness: Warm white 180LM
 Cool white 180LM
 Wattage: 3.5W CRI: 70-85
 Input Voltage: AC100-240V 50-60Hz



Item: MR16AL-SMD60S
Housing Material: Aluminum body+Glass cover
Beam Angle: 120°
LED: SMD3528 60LEDS
Brightness: Warm white 240LM
Cool white 240LM
Wattage: 4.5W CRI: 70-85
Input Voltage: AC/DC 12V



MR16AL-SMD60S



Item: GU10AL-SMD60S
Housing Material: Aluminum body+Glass cover
Beam Angle: 120°
LED: SMD3528 60LEDS
Brightness: Warm white 240LM
Cool white 240LM
Wattage: 4.5W CRI: 70-85
Input Voltage: AC100-240V 50-60Hz



GU10AL-SMD60S



Item: JDRE27AL-SMD60S
Housing Material: Aluminum body+Glass cover
Beam Angle: 120°
LED: SMD3528 60LEDS
Brightness: Warm white 240LM
Cool white 240LM
Wattage: 4.5W CRI: 70-85
Input Voltage: AC100-240V 50-60Hz



JDRE27AL-SMD60S



Item: JDRE14AL-SMD60S
Housing Material: Aluminum body+Glass cover
Beam Angle: 120°
LED: SMD3528 60LEDS
Brightness: Warm white 240LM
Cool white 240LM
Wattage: 4.5W CRI: 70-85
Input Voltage: AC100-240V 50-60Hz



JDRE14AL-SMD60S



GU11AL-SMD03C



Item: GU11AL-SMD12D
 Housing material: Aluminum Body+PC cover
 LED: SMD 3014 12 pcs
 Beam Angle: 120°
 Color: Warm white, Cool white
 Brightness: Warm white 110lm, White 110lm
 Wattage: 1.5W
 Lamp Base: MR16
 Voltage: AC/DC12V
 Size: D ϕ 34xH39mm



MR11AL-SMD03C



Item: GU11AL-SMD12C
 Housing material: Aluminum Body+PC cover
 LED: SMD 3014 12 pcs
 Beam Angle: 120°
 Color: Warm white, Cool white
 Brightness: Warm white 110lm, Cool white 110lm
 Size: D ϕ 34xH50mm
 Wattage: 1.5W
 Lamp Base: GU10
 Voltage: AC220-240V 50-60Hz



GU10AL-SMD06C



Item: GU10AL-SMD06C
 Housing Material: Aluminum body+ Glass cover
 Brightness: Warm white 290LM, Cool white 310LM
 LED: SMD5630
 CRI: 70-85
 Color: Warm white, Cool white
 Lamp Base: GU10
 Wattage: 4W
 Input Voltage: AC100-240V 50-60Hz
 Product Size: D ϕ 50mmXH54mm



| G4B-9B




Item: G4B-9B
Housing: Fiber PCB
LED: SMD5050 9PCS
Color: Red/ Yellow/ Blue/ Green/
White/ Warmwhite
Wattage: 1.5W
Input Voltage: AC / DC12V
Product Size: $\varnothing 28\text{mm} \times \text{H}11\text{mm}$



| G4A-6B



Item: G4A-6B
Housing: Fiber PCB
LED: SMD5050 6PCS
Color: Red/ Yellow/ Blue/ Green/
White/ Warmwhite
Wattage: 1W
Input Voltage: AC / DC12V
Product Size: $\varnothing 24\text{mm} \times \text{H}11\text{mm}$

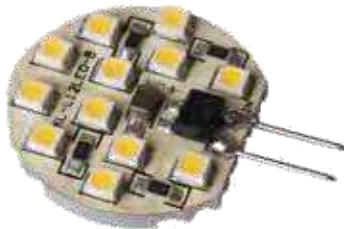

| G4D-12S




Item: G4D-12S
Housing: Aluminium PCB
LED: SMD3528 12PCS
Color: Red/ Yellow/ Blue/ Green/
White/ Warmwhite
Wattage: 0.7W
Input Voltage: AC / DC12V
Product Size: $\varnothing 26.5\text{mm} \times \text{H}11\text{mm}$



| G4C-12B



Item: G4C-12B
Housing: Fiber PCB
LED: SMD5050 12PCS
Color: Red/ Yellow/ Blue/ Green/
White/ Warmwhite
Wattage: 2W
Input Voltage: AC / DC12V
Product Size: $\varnothing 31\text{mm} \times \text{H}11\text{mm}$

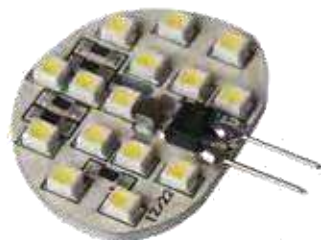

| G4F-15S



Item: G4F-15S
Housing: Aluminium PCB
LED: SMD3528 15PCS
Color: Red/ Yellow/ Blue/ Green/
White/ Warmwhite
Wattage: 0.9W
Input Voltage: AC / DC12V
Product Size: $\varnothing 33\text{mm} \times \text{H}11\text{mm}$



| G9-SMD12D



Item: G9-SMD12D
Housing material: Aluminum Body+PC cover
LED: SMD 2835 Beam Angle: 180 Degree
Color: Warm white, Cool white
Brightness: Warm white 85lm, Cool white 95lm
Wattage: 1.2W Lamp Base: G9
Voltage: AC220-240V 50-60Hz



I BLC35J-SMD18D



Item: BLC35J-SMD18D
Housing material: Thermal Plastic+Glass Milky cover
LED: SMD 2835
Color: Warm white, Natural white, Cool white
CRI: 70-85
Brightness: Warm white 350lm, Natural white 320lm, Cool white 340lm
Wattage: 3.2W
Lamp Base: E14
Voltage: AC220-240V 50-60Hz
Size: Ø35xH101mm



I BL45J-SMD20D



Item: BL45J-SMD20D
Housing material: Thermal Plastic+Glass Milky cover
LED: SMD 2835
Color: Warm white, Natural white, Cool white
CRI: 70-85
Brightness: Warm white 390lm, Natural white 350lm, Cool white 370lm
Wattage: 3.5W
Lamp Base: E27
Voltage: AC220-240V 50-60Hz
Size: Ø45xH84mm



I BL55J-SMD28D



Item: BL55J-SMD28D
Housing material: Thermal Plastic+Glass Milky cover
LED: SMD 2835
Color: Warm white, Natural white, Cool white
CRI: 70-85
Brightness: Warm white 520lm, Natural white 480lm, Cool white 500lm
Wattage: 5W
Lamp Base: E27
Voltage: AC220-240V 50-60Hz
Size: Ø55xH98mm



Item: BL55J-SMD38D
 Housing material: Thermal Plastic+Glass PC cover
 LED: SMD 2835
 Color: Warm white, Natural white, Cool white
 CRI: 70-85
 Brightness: Warm white 760lm, Natural white 710lm, Cool white 740lm
 Wattage: 7W
 Lamp Base: E27
 Voltage: AC220-240V 50-60Hz
 Size: Ø55xH110mm



BL55J-SMD38D



Item: BL60J-SMD45D
 Housing material: Thermal Plastic+ Milky PC cover
 LED: SMD 2835
 Color: Warm white, Natural white, Cool white
 CRI: 70-85
 Brightness: Warm white 930lm, Natural white 880lm, Cool white 910lm
 Wattage: 9W
 Lamp Base: E27
 Voltage: AC220-240V 50-60Hz
 Size: Ø60xH108mm



BL60J-SMD45D



Item: BL65J-SMD50D
 Housing material: Thermal Plastic+ Milky PC cover
 LED: SMD 2835
 Color: Warm white, Natural white, Cool white
 CRI: 70-85
 Brightness: Warm white 1050lm, Natural white 980lm, Cool white 1020lm
 Wattage: 10W
 Lamp Base: E27
 Voltage: AC220-240V 50-60Hz
 Size: Ø65xH115mm



BL65J-SMD50D



I BLC37H-SMD20D



Item: BLC37H-SMD20D
 Housing material: Ceramics Body+Glass Milky cover
 LED: SMD 2835
 Color: Warm white, Natural white, Cool white
 CRI: 70-85
 Brightness: Warm white 380lm, Natural white 390lm, Cool white 400lm
 Wattage: 4W
 Lamp Base: E14/E27
 Voltage: AC220-240V 50-60Hz
 Size: Ø37xH110mm



I BL50H-SMD20D



Item: BL50H-SMD20D
 Housing material: Ceramics Body+Glass Milky cover
 LED: SMD 2835
 Color: Warm white, Natural white, Cool white
 CRI: 70-85
 Brightness: Warm white 380lm, Natural white 390lm, Cool white 400lm
 Wattage: 4W
 Lamp Base: E27
 Voltage: AC220-240V 50-60Hz
 Size: Ø50xH100mm



I BL50H-SMD32D




Item: BL50H-SMD32D
 Housing material: Ceramics Body+Glass Milky cover
 LED: SMD2835
 Color: Warm white, Natural white, Cool white
 CRI: 70-85
 Brightness: Warm white 600lm, Natural white 610lm, Cool white 630lm
 Wattage: 6W
 Lamp Base: E27
 Voltage: AC220-240V 50-60Hz
 Size: Ø50xH100mm



Item: BL60H-SMD45D
 Housing material: Ceramics Body+Glass Milky cover
 LED: SMD 2835
 Color: Warm white, Natural white, Cool white
 CRI: 70-85
 Brightness: Warm white 850lm, Natural white 870lm, Cool white 890lm
 Wattage: 9W
 Lamp Base: E27
 Voltage: AC220-240V 50-60Hz
 Size: Ø60xH109mm



BL60H-SMD45D

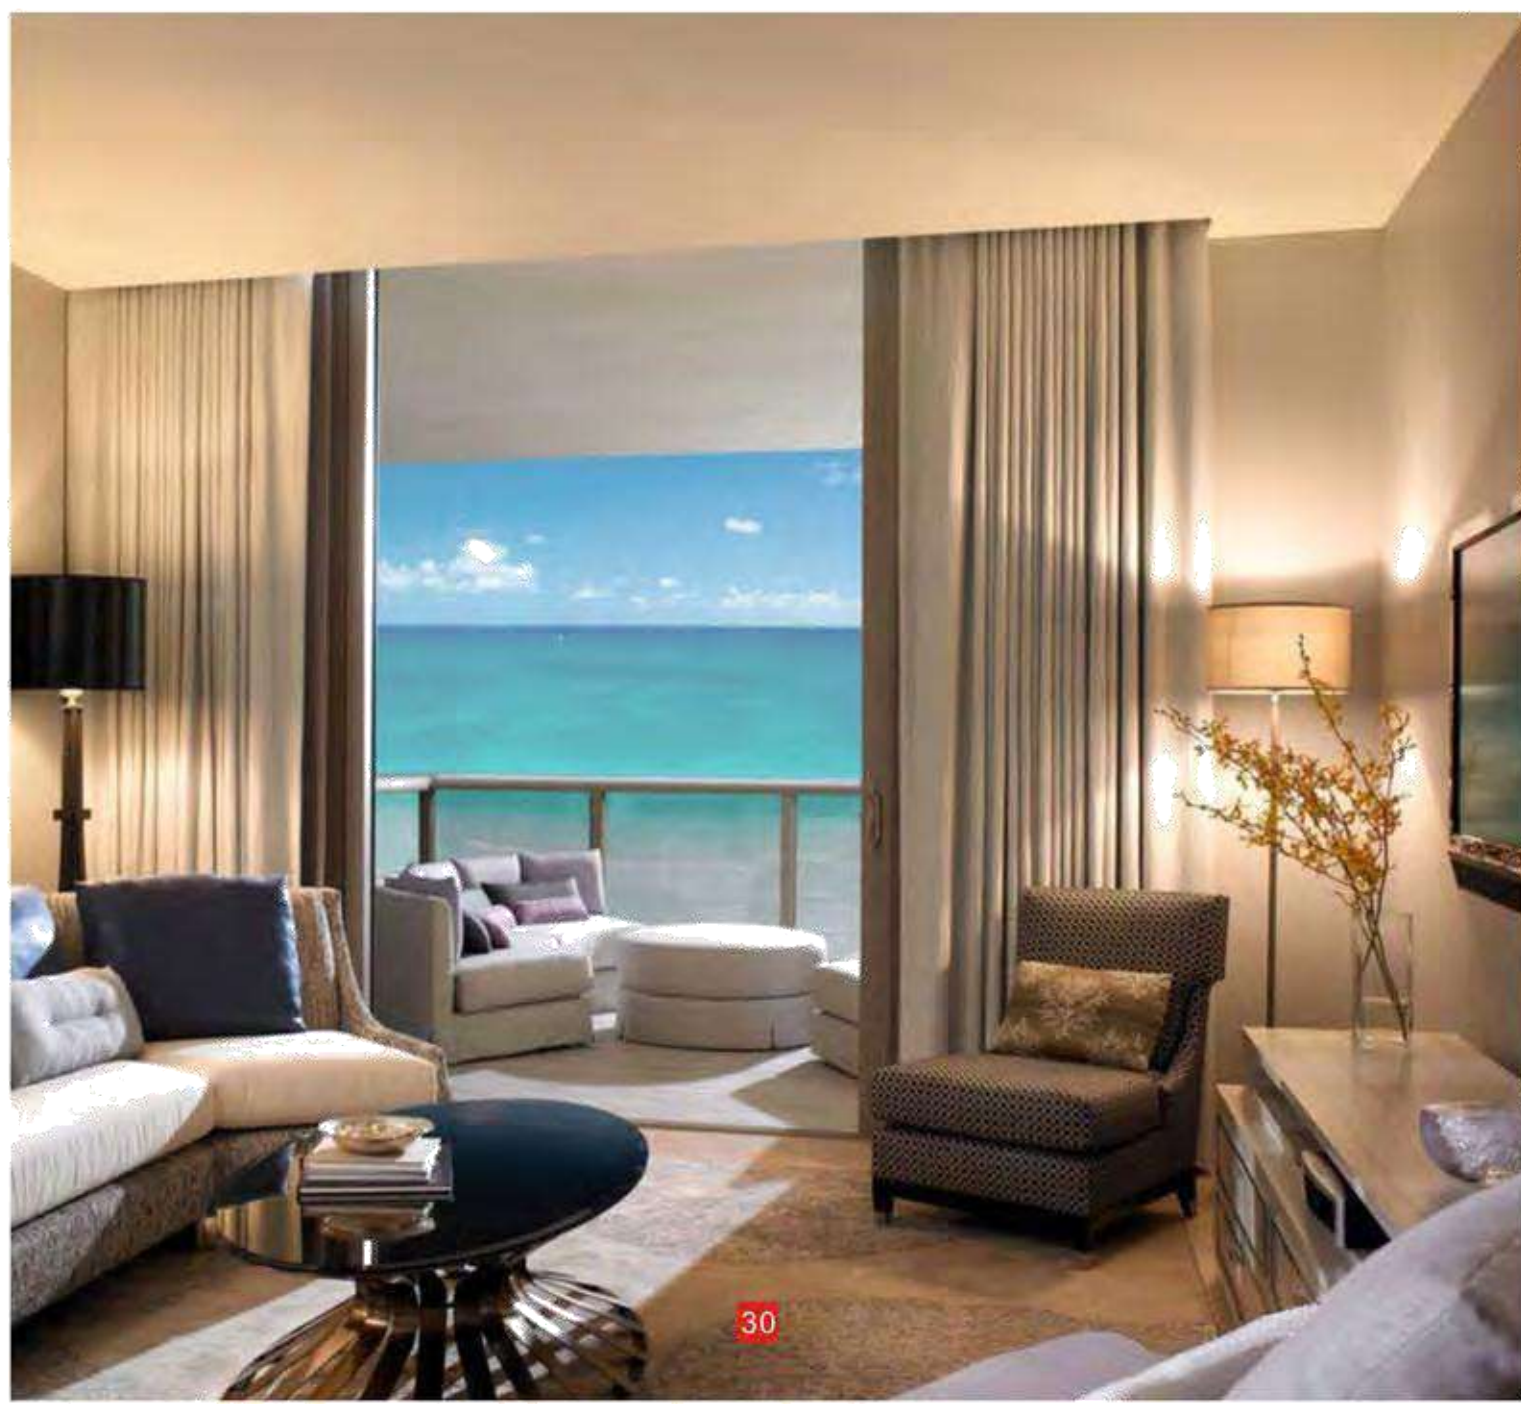

LED CANDLE LIGHT SERIES



| BLC35-SMD06C



| BLC35-SMD06C



Item: BLC35-SMD06C
Housing material: Aluminum Body+Glass cover
LED: SMD 5630
Beam Angle: 360°
Color: Warm white, CoolWhite
Brightness: Warm white 210lm, CoolWhite 240lm
CRI: 70-85
Wattage: 3.5W
Lamp Base: E14
Voltage: AC180-240V 50-60Hz



| BLC34-SMD10E



| BLC34-SMD10E



Item: BLC34-SMD10E
Housing material: Aluminum Body+Glass Transparent cover
LED: SMD3020
Beam Angle: 360°
Color: Warm white, Coolwhite
Brightness: Warm white 300lm, Coolwhite 320lm
Wattage: 4W
Lamp Base: E14 (E11 E12 E17 E26 E27 B15 B22 available)
Voltage: AC85-240V 50-60Hz



| BL40-SMD10E



Item: BL40-SMD10E
Housing material: Aluminum Body+Glass Transparent cover
LED: SMD 3020
Beam Angle: 360°
Color: Warm white, Coolwhite
Brightness: Warm white 300lm, CoolWhite 320lm
Wattage: 4W
Lamp Base: E14 (E11 E12 E17 E26 E27 B15 B22 available)
Voltage: AC85-240V 50-60Hz



Item: BLC37B-SMD06C-E14
BLC37B-SMD06C-E27
Housing Material: Aluminum + PC cover
LED: SMD 5630
Brightness: Warm white 240lm, CoolWhite 240lm
Wattage: 3.5W
CRI: 70-85
Input Voltage: AC100-240V 50-60Hz
Products Size: E14 Ø37mm * H116.5mm
E27 Ø37mm * H116.5mm



| BLC37B-SMD06C-E14
(E14 Base)



| BLC37B-SMD06C-E27
(E27 Base)



Item: BLG50B-SMD06C-E14
BLG50B-SMD06C-E27
Housing Material: Aluminum + glass milky cover
Beam Angle: 180°
LED: SMD 5630
Brightness: Warm white 210lm, CoolWhite 240lm
Wattage: 3.5W
CRI: 70-85
Input Voltage: AC100-240V 50-60Hz



| BLG50B-SMD06C-E14
(E14 Base)



| BLG50B-SMD06C-E27
(E27 Base)



Item: BLT40B-SMD06C-E14
BLT40B-SMD06C-E27
Housing Material: Aluminum + glass milky cover
Beam Angle: 180°
LED: SMD 5630
Brightness: Warm white 200lm, CoolWhite 230lm
Wattage: 3.5W
CRI: 70-85
Input Voltage: AC100-240V 50-60Hz



| BLT40B-SMD06C-E14
(E14 Base)



| BLT40B-SMD06C-E27
(E27 Base)


R39B-SMD30S


Item: R39B-SMD30S
 Housing Material: Aluminium body
 LED: SMD3528 CRI: 70-85
 Brightness: Warmwhite 110LM, Cool white 125LM
 Color: Warmwhite, Coolwhite Lamp Base: E14
 Wattage: 2W
 Input Voltage: AC100-240V 50-60Hz
 Product Size: D 19mm X H 30mm


R50B-SMD08C


Item: R50B-SMD08C
 Housing Material: Aluminum body
 LED: SMD5630 CRI: 70-85
 Brightness: Warm white 330LM Cool white 380LM
 Color: Warm white, Cool white Lamp Base: E14
 Wattage: 4.5W
 Input Voltage: AC100-240V 50-60Hz
 Product Size: D 50mm X H 87mm


R63B-SMD12C


Item: R63B-SMD12C
 Housing Material: Aluminum body
 LED: SMD5630 CRI: 70-85
 Brightness: Warm white 540LM Cool white 610LM
 Color: Warm white, Cool white Lamp Base: E27
 Wattage: 7W
 Input Voltage: AC100-240V 50-60Hz
 Product Size: D 63mm X H 105mm


R80B-SMD45D


Item: R80B-SMD45D
 Housing Material: Aluminum body
 LED: SMD2835 CRI: 70-85
 Brightness: Warm white 750lm, Natural white 780lm, Cool white 800lm
 Color: Warm white, Natural white, Cool white
 Lamp Base: E27
 Wattage: 8W
 Input Voltage: AC220-240V 50-60Hz
 Product Size: D 80mm X H 160mm



Item: BL60M-SMD20C
 Housing Material: Aluminum body + PC cover
 LED: SMD5630
 Beam Angle: 180° CRI: 70-85
 Brightness: Warm white 750lm, Cool white 800lm
 Color: Warm white 2700-3200K, Cool white 5500-6500K
 Lamp Base: E27
 Wattage: 9W
 Input Voltage: AC 100-240V 50-60Hz
 Product Size: D 55mm X H 104mm



BL60M-SMD20C



EMERGENCY LED TUBE

Marelli
lighting

T8-120F-192C

EMERGENCY LED TUBE



Specially design for office and commercial lighting

1. Emergency system design with chargeable battery inside constant current driver.
2. You can use it as normal T8 tube, but can be Emergency lamp once blackout.
3. Can work more than 1.5hours after blackout with 12% brightness of normal full light.
4. This products design meet UL VDE CCC, FCC, CE standards requirements, and approved.
5. With special design, the emergency led tube can be controlled easily by switch as normal T8.



Item: T8-120F-192C
Input: AC200-240V 50Hz or AC90-130V 60Hz
Watt: 18W
Brightness: 1700Lm
PFC>0.9
Heat sink: Aluminum base
Cover: Coarse grain translucent
PC cover or Milky PC cover
Color: WW 2700-3500K
NW 4000-5500K
CW 6000-6500K



T8-120G-384S

VARIABLE COLOR TEMPERATURE TUBE

With special design, our T8 tube can show you different color kelvin from 2700–6500K according to the lamp ambient temperature changing. When you use this lamp in winter lower than 0°C, the T8 tube will be warm white color and show you a warm light, and when you use it in summer more than 40°C, the T8 tube will be cool white, just let you feel cool.

The color temperature changes according to the lamp ambient temperature changing

1. Below 0°C, : Warm white completely;
2. Above 40°C: Cool white completely;
3. Between 0°C–40°C variable , the color changes between 2700–6500 K.

Item: T8-120G-384S

Input Voltage: AC100–240V 50–60Hz

PFC >0.9 Watt: 20W

Power Efficiency: >80%

Heat sink: Aluminum base

Cover: Coarse grain translucent

PC cover or milky cover

Length: 1214mm

Beam Angle: >120°

Lamp base: G13

Avg. luminous Flux: 1600lm

Color Temperature:

WW: 2700–3500K

NW: 4000–5500K

CW: 6000–6500K





T8-120E-192S

LED SENSOR TUBE

1. Sensor sensitivity: Sensor for infrared body induction
2. Sensing distance: 4–6 meter
3. 30 seconds after the leave, the brightness is reduced to 20% of original brightness or completely extinguished and can be customized according to customer demand

Product Item	LED Source
T8-120E-192S	SMD3528 (Coolwhite, Warmwhite)
LED Amount	WATTS
192 leds/pc	18W
Cover	Product Size
Coarse grain translucent PC cover or milky cover	1214x29mm
Input Voltage	Brightness
AC100-240V 50-60Hz	1710LM/1580LM





| T8-120D-192S

SWITCH DIMMABLE LED TUBE

1. The led tube can be dimmable by normal wall switch without changing the conditions of the original lighting system;
2. There are 3 levels of dimming settings: 100%-50%-20% circularly;
3. Specially design for home and office lighting.

Item: T8-120D-192S
 Input Voltage: AC100-240V 50-60Hz
 PFC >0.85
 Power Efficiency: >85%
 Heat sink: Aluminium base
 Cover: Coarse grain translucent
 PC cover or Milky PC cover
 Length: 1214mm
 Power consumption: 18W
 Avg. Luminous Flux Output: 1700lm
 Color Temperature: WW 2700-3500K
 NW 4000-5500K
 CW 6000-6500K





LED TUBE SERIES

Materials and features:

1. Cabinet and delicate : oxidation process ,concise and easy ,convenient installation
2. The cover is made of advanced flame-retardant plastic, high temperature, corrosion-resistant
3. Built-in high performance constant current power, no noise, no flicker, light and color consistency
4. High luminous efficiency, long life. With Coarse grain translucent PC cover or Milky PC cover.
5. Color Available: WW 2700-3500K, NW 4000-5500K, CW 6000-6500K




Product Item	LED Source	LED Amount	Input Voltage	WATTS	Cover	Product Size	Brightness
T8-60KB-96D	SMD 2835 (Warm white, Natural white, Cool white)	96leds/pcs	AC100-240V	9W	Milky/Transparent	614x29mm	800Lm±10%
T8-120KB-192D	SMD 2835 (Warm white, Natural white, Cool white)	192leds/pcs	AC100-240V	18W	Milky/Transparent	1214x29mm	1600Lm±10%
T8-150KB-210D	SMD 2835 (Warm white, Natural white, Cool white)	216leds/pcs	AC100-240V	20W	Milky/Transparent	1514x29mm	1850Lm±10%

- SMD LED as lighting sources.
- Aluminium material housing with excellent heat conduction.
- Life span up to 20,000hours, the LED efficiently protected by constant current driver.
- Environmental protection, no mercury and hazardous substances.
- Save 50% electricity compared to energy saving lights.
- No glare, no noise.
- Widely used for indoor lighting, such as hotel, restaurant and home lighting, etc




Item: G24-SMD44S
Housing Material: Aluminum material+ Milky PC cover
Beam Angle: 120°
LED: SMD2835
Color: Warm white, Natural white, Cool white CRI: 70-85
Brightness: Warm white 620LM, Natural white 650LM, Cool white, 650LM
Wattage: 8W Lamp Base: G24/E27
Input Voltage: AC100-240V 50-60Hz
Size: 149x115x35x28mm

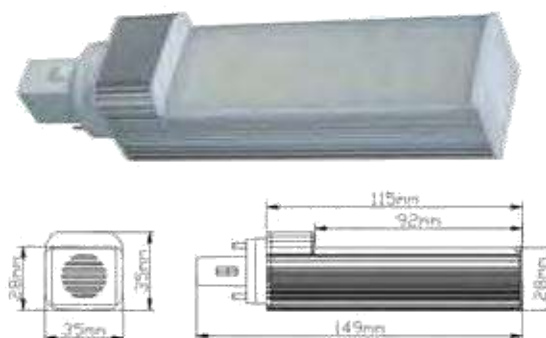

G24-SMD44S




Item: G24-SMD52S
Housing Material: Aluminum material+ Milky PC cover
Beam Angle: 120°
LED: SMD2835
Color: Warm white, Natural white, Cool white CRI: 70-85
Brightness: Warm white 750LM, Natural white 800LM, Cool white 800LM
Wattage: 10W Lamp Base: G24/E27
Input Voltage: AC100-240V 50-60Hz
Size: 165x133x35x28mm

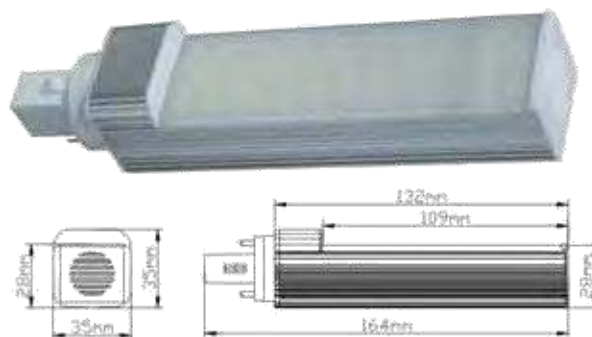

G24-SMD52S



发光角度: 120° 光源: SMD 2835
颜色: 暖白, 自然白, 冷白
显色指数: 70-85
亮度: 暖白940LM, 自然白1000LM, 冷白1000LM
功率: 10W 底座: G24/E27
电压: AC100V-240 50-60Hz
尺寸: 193x161x35x28mm
Item: G24-SMD64S
Housing Material: Aluminum material+ Milky PC cover
Beam Angle: 120°
LED: SMD2835
Color: Warm white, Natural white, Cool white CRI: 70-85
Brightness: Warm white 940LM, Natural white 1000LM, Cool white, 1000LM
Wattage: 10W Lamp Base: G24/E27
Input Voltage: AC100-240V 50-60Hz
Size: 193x161x35x28mm

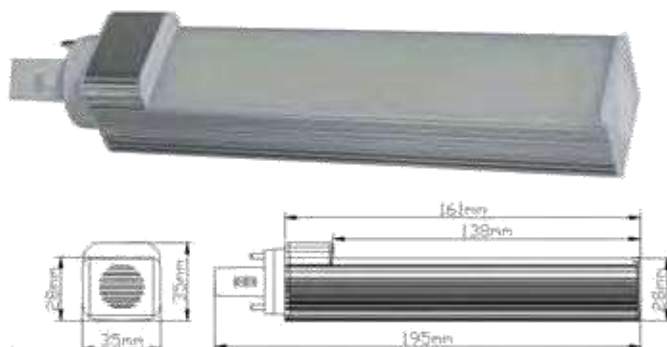

G24-SMD64S



LED PANEL LIGHT SERIES

Subversion of the traditional flat LED light-emitting properties of light ,with its ultra-thin,surface light,energy saving ,environmental protection ,health and other characteristics wonderful debut,is the premier office ,home advertising lighting choice Energy-saving high brightness ,no infrared ,no UV,no heat effect ;The latest high efficiency (95%) ,constant current drive,Bright and uniform light:bright light completely flat out ,emitting a wider perspective

Item:CEPS6060
Housing Material:Die-casting aluminum body (Jointless, artistic frame)
LED:312 pcs SMD 2835
Color:Warm white 2700~3200K,Natural White 4000~4500K,White 6000~6500K
CRI:70~85
Brightness:4500Lm $\pm$ 10%
Wattage:60W
Size:L595xW595xH12mm
Input Voltage:AC100~240V 50~60Hz



CEPS6060

Item:CEPS2020
 Housing Material:Die-casting aluminum body (Jointless, artistic frame)
 LED:80 pcs SMD 2835
 Color:Warm white 2700-3200K,Natural White 4000-4500K,White 6000-6500K
 CRI:70-85
 Brightness:1100Lm $\pm$ 10%
 Wattage:15W
 Size:245*245*11mm Super slim
 Input Voltage:AC100-240V 50-60Hz



| CEPS2020

Item:CEPS3030
 Housing Material:Die-casting aluminum body (Jointless, artistic frame)
 LED:208 pcs SMD 3014
 Color:Warm white 2700-3200K,Natural White 4000-4500K,White 6000-6500K
 CRI:70-85
 Brightness:1200Lm $\pm$ 10%
 Wattage:20W
 Size:325*325*11mm Super slim
 Input Voltage:AC100-240V 50-60Hz



| CEPS3030

Item:CEPS4040
 Housing Material:Die-casting aluminum body (Jointless, artistic frame)
 LED:208 pcs SMD 2835
 Color:Warm white 2700-3200K,Natural White 4000-4500K,White 6000-6500K
 CRI:70-85
 Brightness:3000Lm $\pm$ 10%
 Wattage:40W
 Size:420*420*11mm Super slim
 Input Voltage:AC100-240V 50-60Hz



| CEPS4040

Character and Application:

Each strip is equipped with special accessory, easy to install;
light source of various plastic interior and advertising word word light and so on.

LED SMD STRIP SERIES



JH-SMD5060A



JH-SMD5036A



JH-SMD5030A



JH-SMD5042A



JH-SMD50T18A




JH-SMD5036B

Part No.	LED Type	LED Qty	LED Color	Voltage	Wattage	Size
JH-SMD5060A	SMD3528	60leds/pcs	R/Y/B/G/W/WW/RGB	DC12V	4.8W	L500xW11mm
JH-SMD5036A	SMD5050	36leds/pcs	R/Y/B/G/W/WW/RGB	DC12V	8.64W	L500xW11mm
JH-SMD5030A	SMD5050	30leds/pcs	R/Y/B/G/W/WW/RGB	DC12V	7.2W	L500xW11mm
JH-SMD5042A	SMD3528	42leds/pcs	R/Y/B/G/W/WW	DC12V	3.36W	L500xW11mm
JH-SMD50T18A	SMD5050	18leds/pcs	R/Y/B/G/W/WW/RGB	DC12V	4.32W	L500xW11mm
JH-SMD5636B	SMD5630	36leds/pcs	R/Y/B/G/W/WW/RGB	DC12V	4.2W	L500xW11mm




PROF-005
Two side light profile

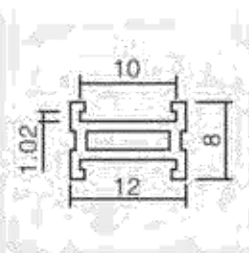


PROF-005

1. 6063 Aluminium material
2. Primary color oxidation treatment
3. Length can be customized (6mt max)

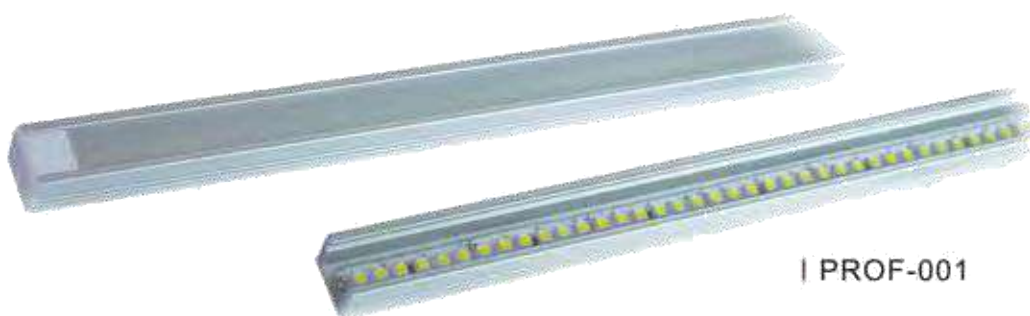

| PROF-001

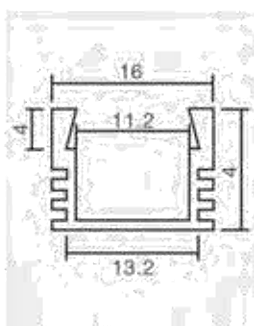

PROF-001


1. 6063 Aluminium material
2. Primary color oxidation treatment
3. Length can be customized (6mt max)

ACCE-003: PC End cap

ACCE-001: PC cover with transparent or milky cover for option



| PROF-009

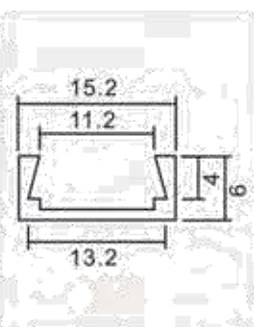

PROF-009

1. 6063 Aluminium material
2. Primary color oxidation treatment
3. Length can be customized (6mt max)

ACCE-004: PC End cap


ACCE-001: PC cover with transparent or milky cover for option

ACCE-002: Holder for fixing






| PROF-002

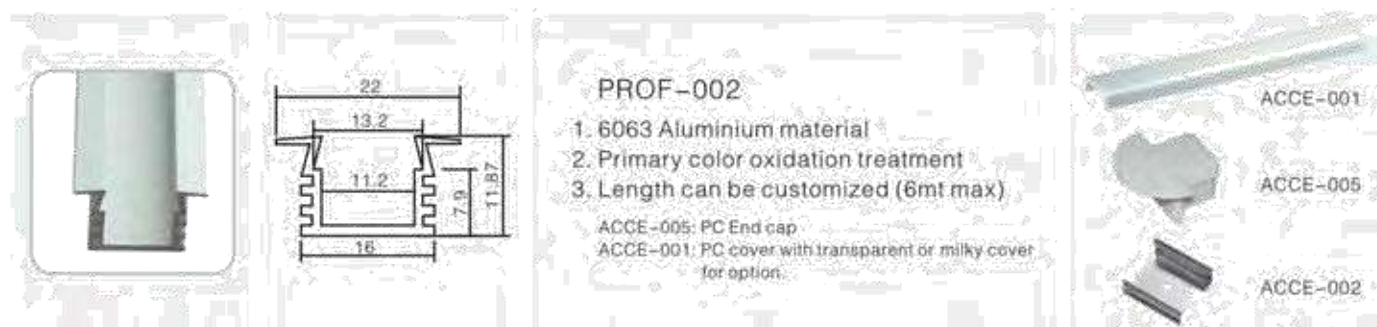


| PROF-003

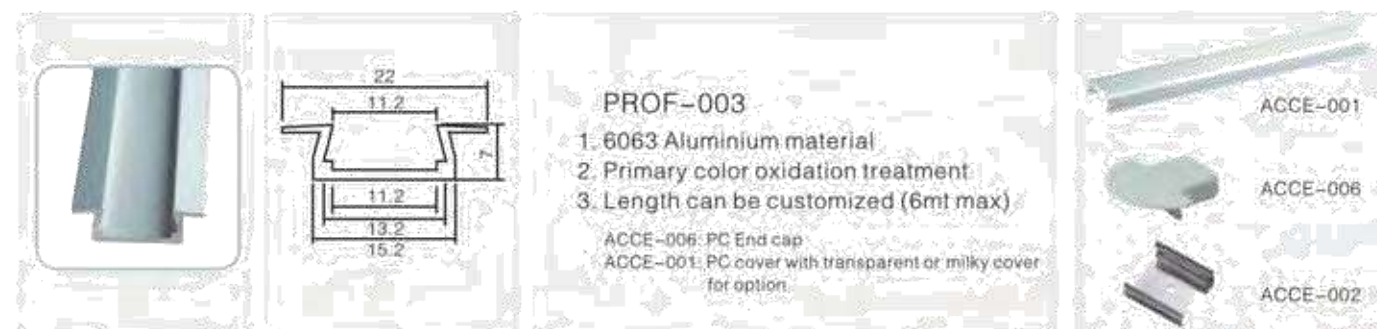



| PROF-008




PROF-008

1. 6063 Aluminium material
2. Primary cover oxidation treatment
3. Length can be customized (6mt max)

ACCE-007: PC End cap
ACCE-001: PC color with transparent milky cover for option.





| PROF-006



PROF-006


1. 6063 Aluminium material
2. Primary cover oxidation treatment
3. Length can be customized (6mt max)
4. Transparent or milky cover for option.

ACCE-009: PC End cap (left or right side for option.)
ACCE-008: PC extend connector (left or right side for option.)
ACCE-010: Metal cable tube length can be customized.





I PROF-004



PROF-004

1. 6063 Aluminium material
2. Primary cover oxidation treatment
3. Length can be customized (6mt max)
4. Transparent or milky cover for option

ACCE-001: Milky PC cover
ACCE-002: Holder for fixing




ACCE-018



ACCE-002



I PROF-007



PROF-007

1. 6063 Aluminium material
2. Primary cover oxidation treatment
3. Length can be customized (6mt max)
4. Transparent or milky cover for option

ACCE-012: PC extend connector
(male or female connector for option.)
ACCE-011: Power connector, DC Plug: 5.5x2.1
Total Length: 32cm
ACCE-002: Installation holder (L20xW17.7xH7.6mm)



ACCE-011




ACCE-019



ACCE-012



ACCE-002

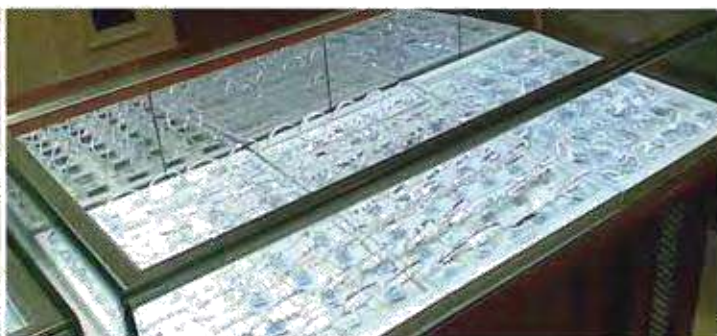



Headquarter: Rruga Vllazen Huta,101/3 - 1017 TIRANA (Albania)

Production: Industrial Area Prush - 1000 TIRANA (Albania)

Tel/Fax: +355.4.2379716 - Email: marellilighting@yahoo.it

www.marellilighting.eu

www.ercolemarelligroup.eu